




## Air VPM



<b>Dimensions (mm)</b>	LxWxH = 250 x 270 x 635
<b>Mass</b>	34 kgs
<b>Max Static Head</b>	55 m
<b>Max Output Delivery</b>	1200 lpm
<b>Air Inlet tap</b>	25mm (BSPP)
<b>Air Exhaust Tap</b>	32mm (BSPP)
<b>Exhaust Hose Size</b>	38mm
<b>Discharge Pipe Tap</b>	50mm
<b>Air Consumption</b>	3,42m <sup>3</sup> /min
<b>Optimum Operating Pressure</b>	6 bar
<b>Minimum Operating Pressure</b>	3,5 bar
 <b>Material</b>	 Spheroidal Graphite Cast Iron

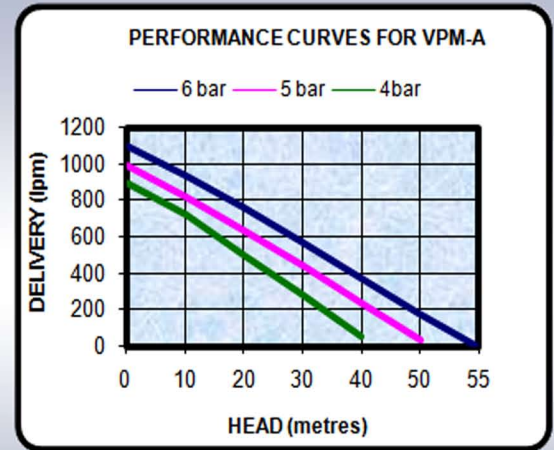

- o This Pump Can Run Dry!
- o No foot valve - no priming
- o Modular Design for easy repairs on site
- o Moves suspended solids of up to 6mm
- o Large capacity lubricator in the head allows for 16 hours of continuous running without attention.
- o Low cost - Low cost maintenance
- o Manufactured according to The SABS ISO 9000 - 2008 Quality Management System

Tel: 011 873-8620 | Fax: 011 825-1401 | Email: wme@mweb.co.za | Web: www.versaflo.co.za

