




Hydraulic VPM



Dimensions (mm)	LxWxH = 250 x 230 x 335
Mass	23 kgs
Max Static Head	50 m
Max Output Delivery	1200 lpm
Discharge Pipe Tap	50mm
Hydraulic Inlet Tap	12mm (1/2") BSPP
Hydraulic Return Pipe Tap	12mm (1/2") BSPP
Operating Pressure Range	90 – 140 bar
Optimum Operating Pressure	110 bar
Input Hydraulic Flow Range	26 – 32 lpm

Material

Standard: Hydraulic Motor – Aluminium Wet-End - Spheroidal Graphite Cast Iron
Flameproof: (Special) Cast Iron Casing Throughout

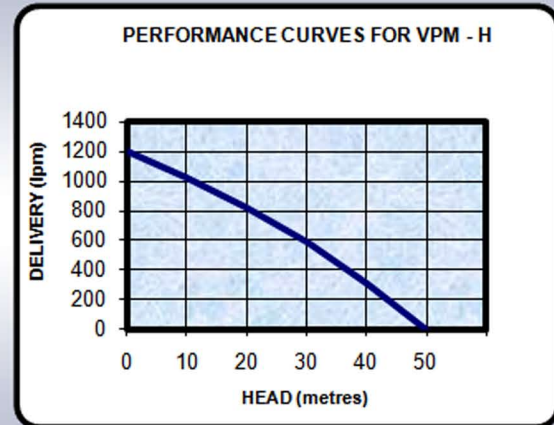

- o This Pump Can Run Dry!
- o No foot valve - no priming
- o Modular Design for easy repairs on site
- o Moves suspended solids of up to 6mm
- o Can pump over 700 lpm at a 25 metre head.
- o Low cost - Low cost maintenance
- o Manufactured according to The SABS ISO 9000 - 2008 Quality Management System

Tel: 011 873-8620 | Fax: 011 825-1401 | Email: wme@mweb.co.za | Web: www.versaflo.co.za

