




VSE 80



Dimensions (mm)	LxW = 1258 x 415
Mass	
Max Static Head	20 m 1450 R.P.M. 11kW
Max Output Delivery	25 l/s
Max Eff	22 l/s - 14 m
Discharge Flange P.C.D.	150
Flange Bolt Hole Diam	18
Discharge Diam	80 mm
Material - Volute & Impeller	Chrome Iron
Sump depth	900 mm

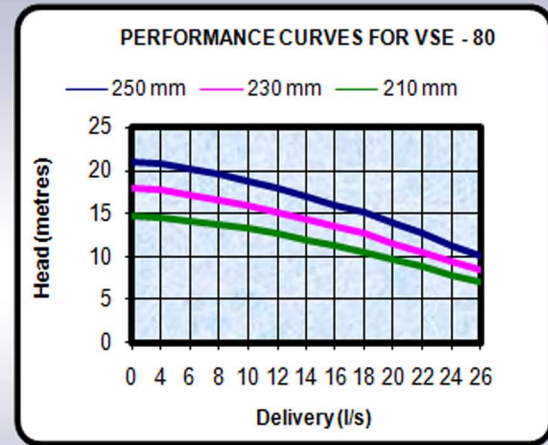

- o Modular Design for easy repairs
- o Separate S.G. Strainer & Hard Chrome-Iron Wear Plate
- o Wet End in Hard Chrome-iron
- o One Piece column with impeller adjustment at drive end
- o Bearing position ensures lower loads and longer life
- o Moves suspended solid of up to 15 mm
- o Sump installation- max immersion depth 900 mm
- o Spares ex-stock
- o This Pump can run dry
- o Manufactured according to SABS ISO 9001 – 2008 Quality Management System

Tel: 011 873-8620 | Fax: 011 825-1401 | Email: wme@mweb.co.za | Web: www.versaflo.co.za

